


COMMON MODE CHOKE - EE SHAPE

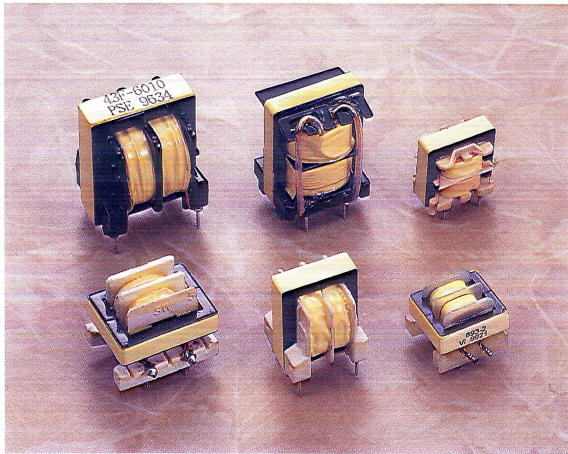

Features


- Excellent frequency characteristics
- Small size and large Inductance
- Voltage rated : 250 VAC

Applications

- Switching power supply
- EMI filter
- Monitor

Part No.	Rated Current (A ac)	Inductance MIN. (mH)	DCR MAX. (Ω)	Pin ϕ (mm)
FE1-453-501	0.5	45.0	3.0	0.6
FE1-203-701	0.7	20.0	1.8	0.6
FE1-153-901	0.9	15.0	1	0.6
FE1-123-102	1.0	12.0	0.8	0.6
FE1-602-152	1.5	6.0	0.3	0.6
FE1-302-202	2.0	3.0	0.15	0.6
FE2-453-501	0.5	45.0	3.2	□0.64
FE2-203-701	0.7	20.0	1.9	□0.64
FE2-153-901	0.9	15.0	1.1	□0.64
FE2-123-102	1.0	12.0	0.85	□0.64
FE2-602-152	1.5	6.0	0.35	□0.64
FE2-302-202	2.0	3.0	0.2	□0.64
FE3-503-701	0.7	50.0	1.5	0.8
FE3-353-901	0.9	35.0	1	0.8
FE3-253-102	1.0	25.0	0.7	0.8
FE3-163-152	1.5	16.0	0.45	0.8
FE3-802-202	2.0	8.0	0.3	0.8
FE3-472-252	2.5	4.7	0.15	0.8
FE4-503-701	0.7	50.0	1.5	0.8
FE4-353-901	0.9	35.0	1	0.8
FE4-253-102	1.0	25.0	0.7	0.8
FE4-163-152	1.5	16.0	0.45	0.8
FE4-802-202	2.0	8.0	0.3	0.8
FE4-472-252	2.5	4.7	0.15	0.8
FE5-503-152	1.5	50.0	0.65	0.8
FE5-253-202	2.0	25.0	0.35	0.8
FE5-183-252	2.5	18.0	0.25	0.8
FE5-133-302	3.0	13.0	0.18	0.8
FE5-103-352	3.5	10.0	0.13	0.8
FE5-802-402	4.0	8.0	0.1	0.8
FE6-403-202	2.0	40.0	0.4	0.8
FE6-223-302	3.0	22.0	0.25	0.8
FE6-163-352	3.5	16.0	0.18	0.8
FE6-123-402	4.0	12.0	0.13	0.8
FE6-103-452	4.5	10.0	0.1	0.8
FE6-802-502	5.0	8.0	0.08	0.8

Dimension & Shapes (mm)

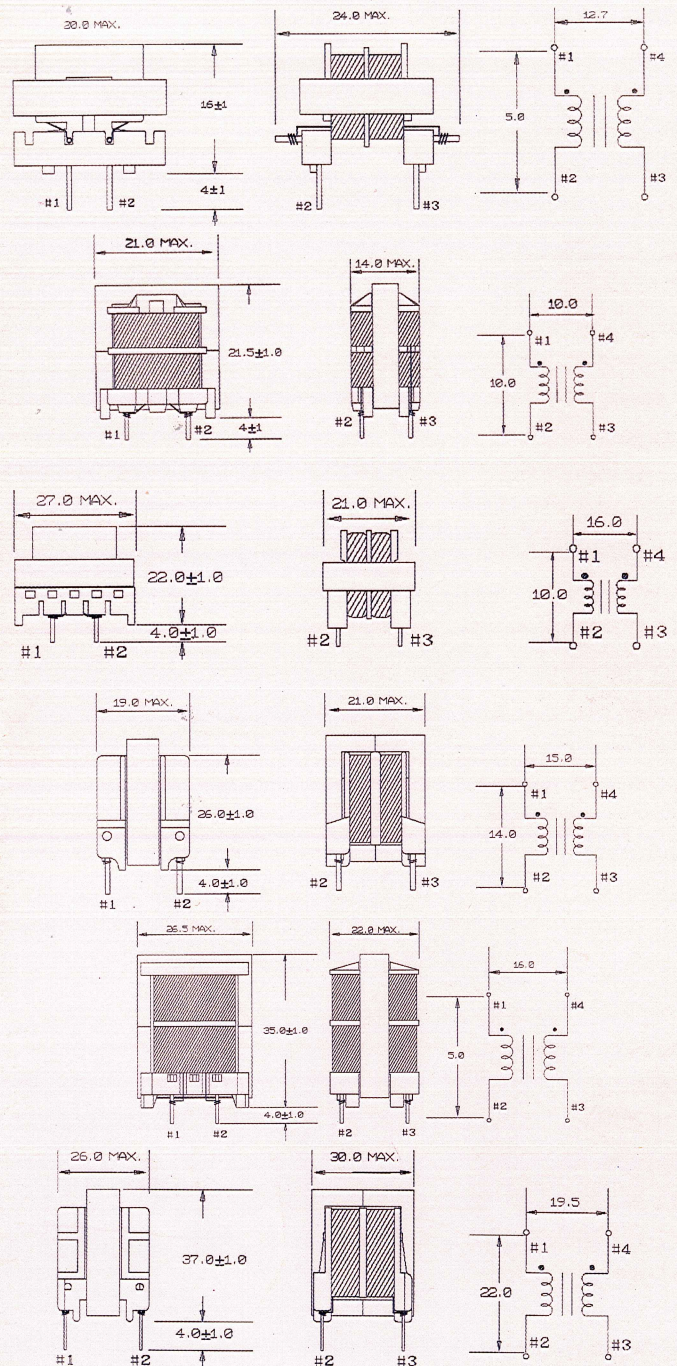

NOTE : 1. Thermal class : A (105°C)
 2. Withstand voltage : 2000 VAC between windings
 3. Testing condition : 1 KHz 0.3V
 4. Temperature rise : 40°C MAX.